


Wall Mounting

- 4x S1  Ø 3 mm
- 2x  Ø 6 mm
- 2x S2  Ø 4,5 mm
- 2x H1 

Pre-drill holes for screw S1.
 Ideally with a 2.5 mm drill,
 alternatively 2 mm.,

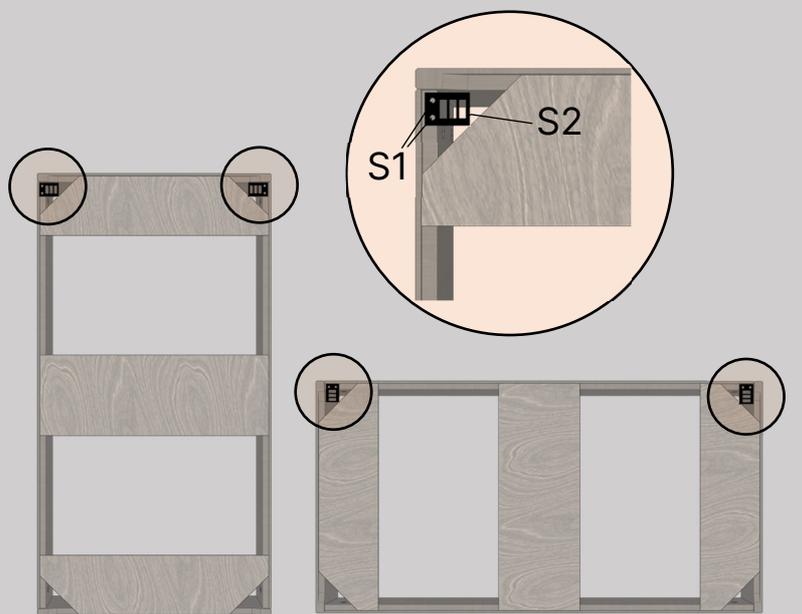


The mounting material is included with each frame, unless the frame is part of a mobile wall or a ceiling mounting set was ordered along with the frame.



Ceiling Mounting

- 8x S1  Ø 3 mm
- 4x  Ø 6 mm
- 4x S2  Ø 4 mm
- 4x 
- 4x 

Pre-drill holes for screw S1.
 Ideally with a 2.5 mm drill,
 alternatively 2 mm.

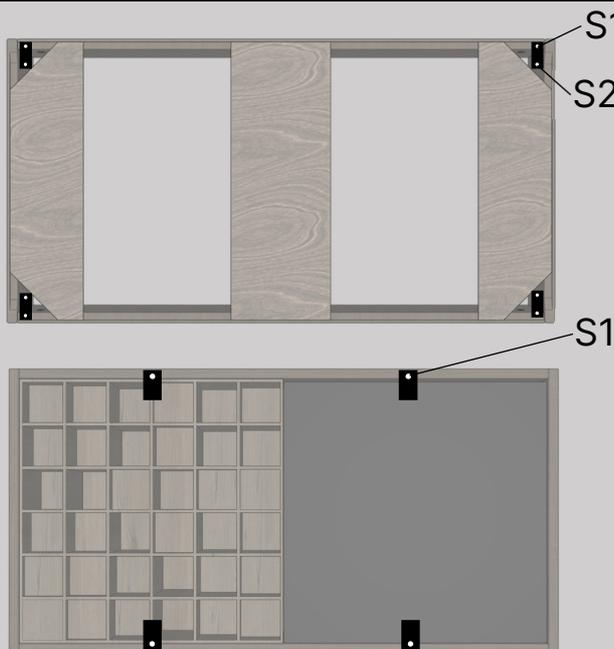

For ceiling installation, the optionally available ceiling mounting set is required.

