











Installation Manual

HOFA Curtain Rail Set Standard

Ceiling Mount

Accessory Parts:

Rail		Number and length depends on the total length of the system
Quick Release Lever		Number depends on the length of the rail
Stopper		Usually, one stopper is required at each outer end of the rail
End Cap		Two end caps are required per rail.
Hook for Curtain Tape		Number depends on the width of the curtain
Roller		Number depends on the width of the curtain
Screw		One screw per quick release lever
Dowel		One dowel per quick release lever

Optional Accessories

Connector		Number depends on the number of rails
------------------	---	---------------------------------------

General Information:



We recommend that two people carry out the installation. Secure fastening and the correct choice of screws and wall plugs always depend on the condition of the wall or ceiling and can only be correctly assessed on site. If in doubt, please consult a tradesperson.



For trouble-free installation, the surface should be as even as possible. Woodchip wallpaper is normally not a problem. On very uneven surfaces, such as natural stone, for example, installation is very difficult or even impossible. On slightly uneven surfaces, e.g. in old houses, the installation of non-split rails is usually also possible.




If you have any questions during the installation of the system, please do not hesitate to contact us by phone or e-mail:

<https://hofa-akustik.de/en/support/contact-team/>

Tools and Equipment Required:

- Drilling machine with drill bit
- Cordless screwdriver with cross bit
- Slotted screwdriver
- Measuring tape or meter stick
- Pen
- Depending on the surface (additionally): mounting adhesive for gluing in the dowels
- To turn the screws of the connectors you need an 3 mm allen key


Overview:

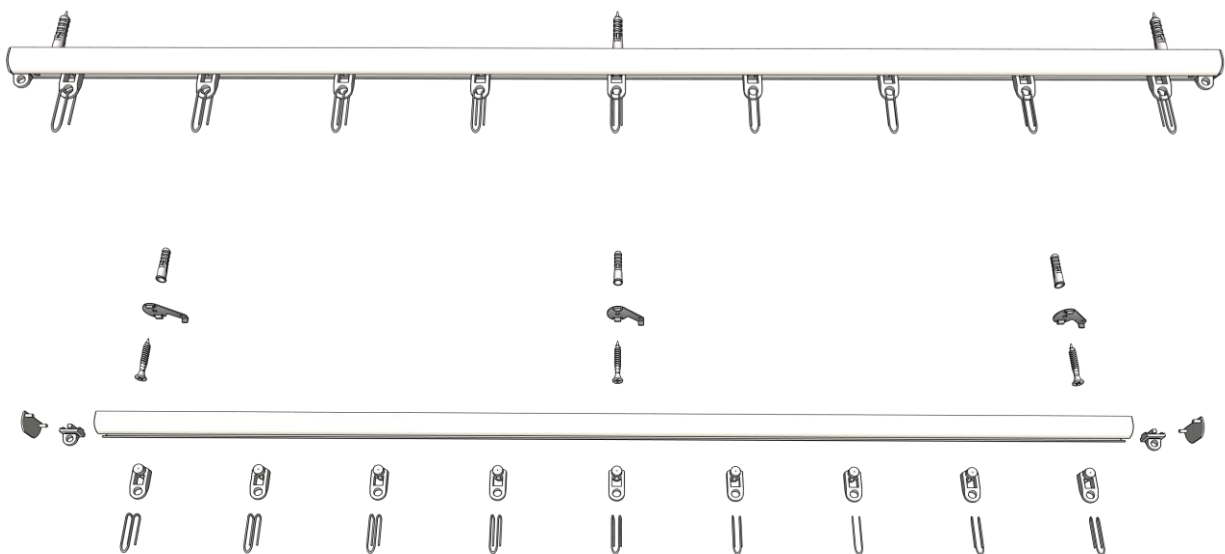


Distribution of the Quick Release Levers

- **Distance:** 40-50 cm; this is also very dependent on the surface.
- **Parking position:** Optionally, depending on the surface and/or in the case of extremely heavy curtains, halve the distances between the holders at the parking position of the curtains. Double check the number of holders in the order!
- **End of the rail:** First and last bracket: 5-10 cm from the end of the rail or connector.
- **Wall distance:** The recommended starting point for the wall distance of the rail is 10-15 cm. If the installation of ISO curtains is limited to windows, the distance from the wall should be reduced to approx. 6-8 cm in order to bring the curtain very close to the wall to the left and right of the window for the best possible sound insulation effect.

Example:

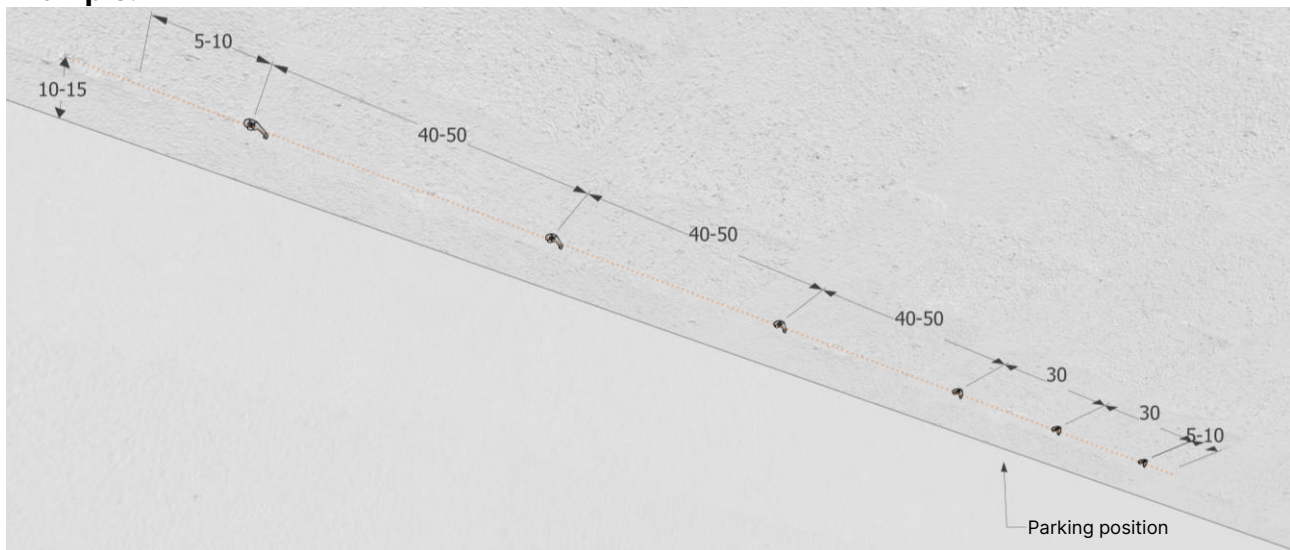


Without rail; quick release levers only

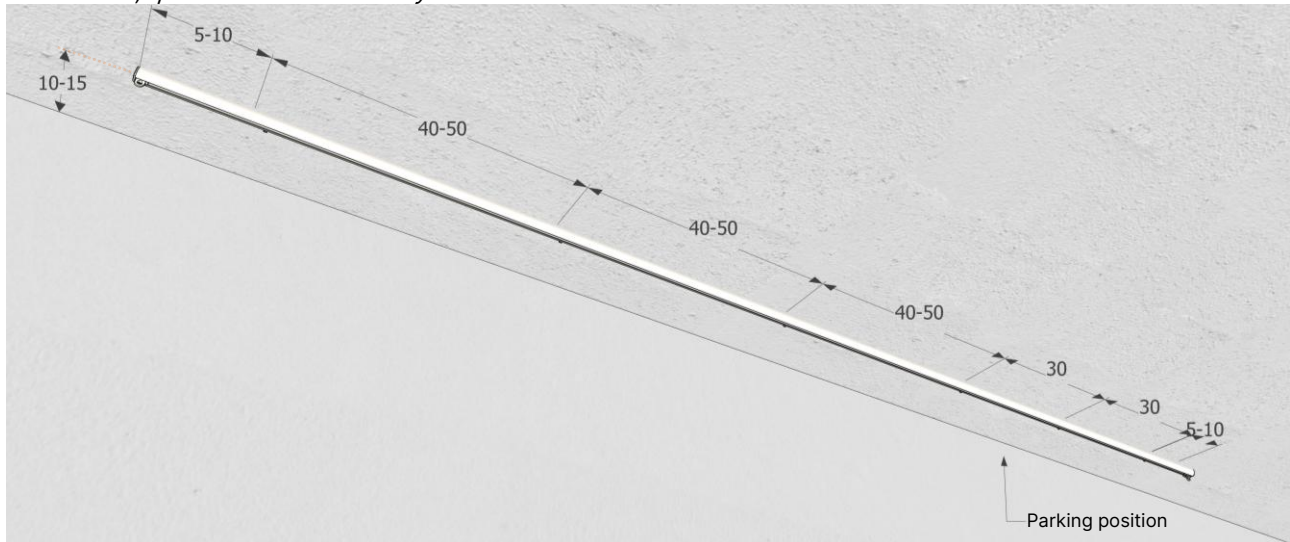

With rail




**Front and rear side
of the rail are different!**

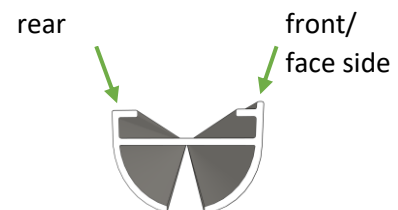

Connecting Split Rails with a Connector


These steps can only be done in the unmounted state.

Step 1

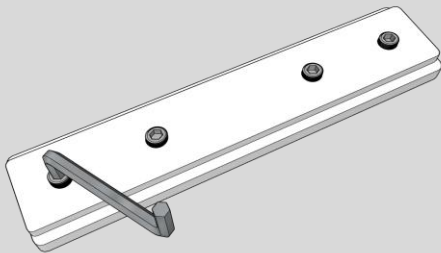


Unscrew the grub screws a bit using an Allen wrench.

Step 2

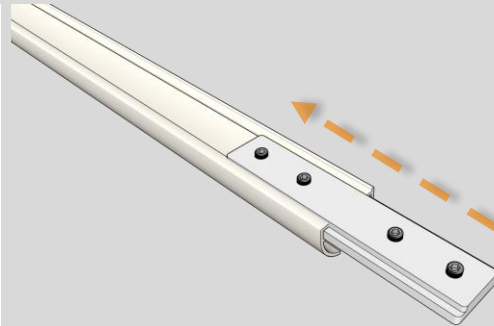


Insert the first rail into the connector, shaking it slightly sideways as you slide it to make it easier to insert.

Step 3

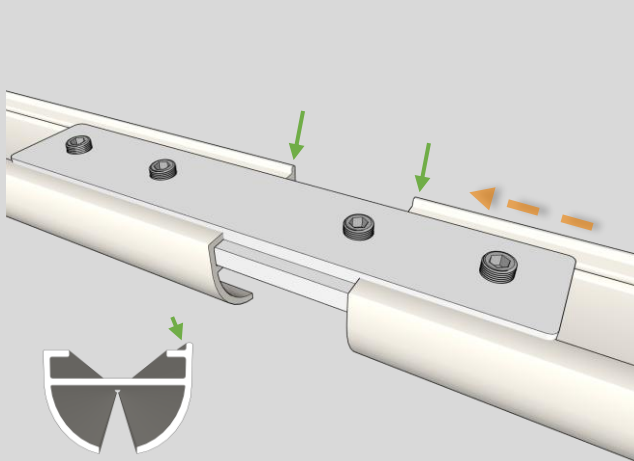

Slide the second rail onto the connector until both rails touch at the end. **Attention:** Note the **front** of the rail.

Step 4

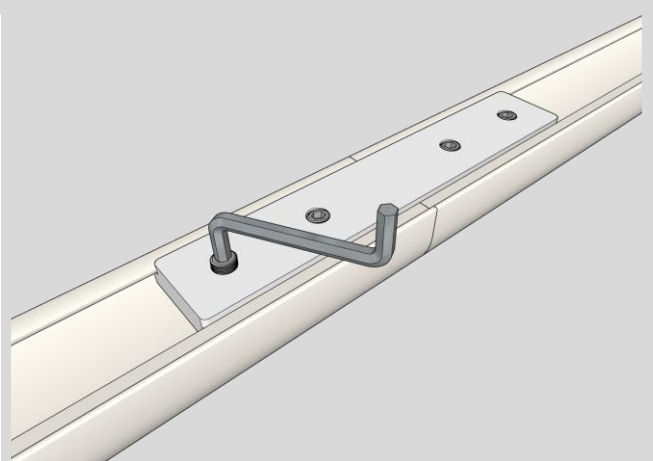

Use an Allen key to tighten the grub screws of the connector up to the top edge. **Attention:** Do not screw further, otherwise the roller run could be affected negatively.

Mounting Steps for Installing the Rail:

Step 1



Mark the drill holes.


Tip: Mark a straight line on the ceiling using a long spirit level or the back of the rail and mark the drill holes.

Step 2



Drill holes and insert dowels.


Step 3

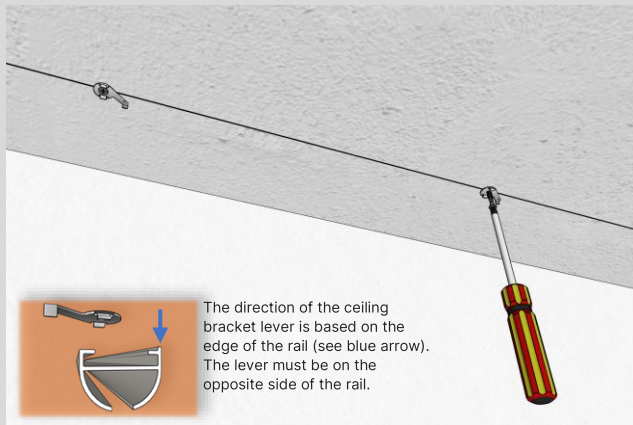

The direction of the ceiling bracket lever is based on the edge of the rail (see blue arrow). The lever must be on the opposite side of the rail.


Tighten the quick release lever with a screwdriver or cordless screwdriver. Note the orientation of the holder.

Step 4

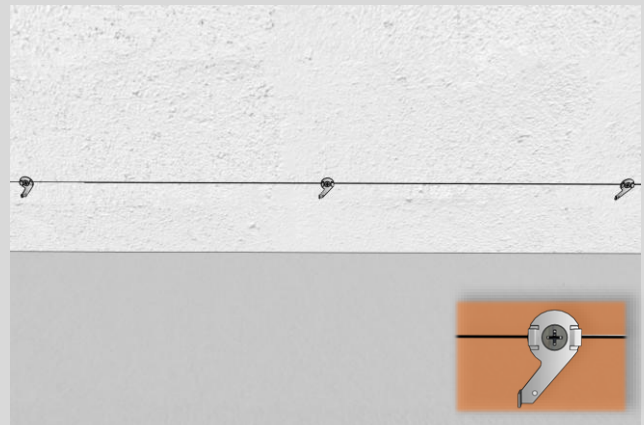


Turn all clips of the ceiling bracket 90° away from the line (open).

Step 5

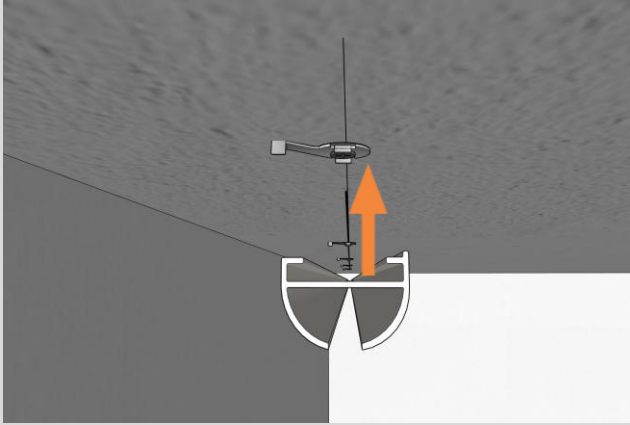

Place the rail in the center under the brackets on the ceiling.

Step 6

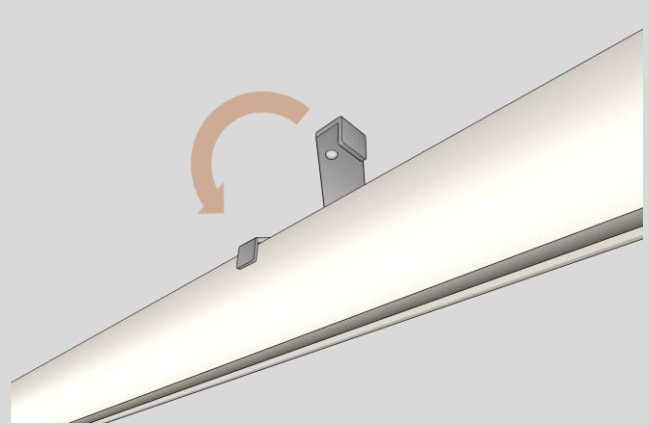


Turn all ceiling brackets back by 90° so that the rail is fixed to the ceiling.

Step 7



Attach a stopper to one side of the rail.

Step 8

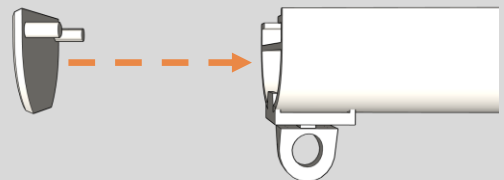


Attach an end cover to this end of the rail.

Inserting the Hooks into the Curtain Tape:

Insert the first hook at a distance of 5 cm to the left and right of the end of the curtain tape. Then distribute all further hooks evenly at the distance in between. The formula for calculating the distance for evenly distributing the hooks is:

Curtain width - 10 cm / (number of hooks - 1)

Sketch:

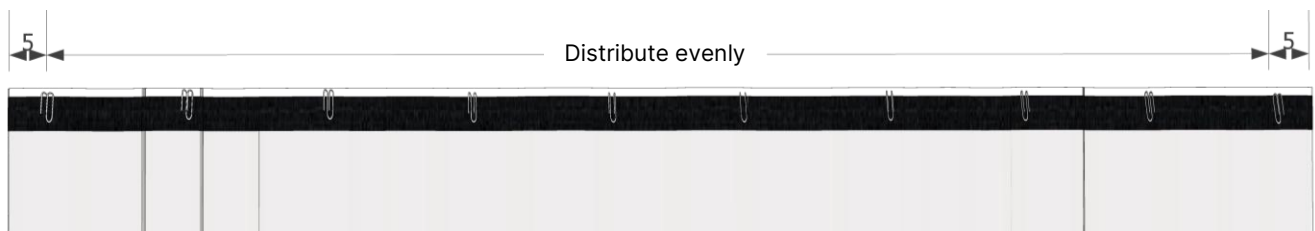

Step 1




Thread a hook through two adjacent narrow flaps.

Step 2



Pull the hook through the wider flaps.

Step 3

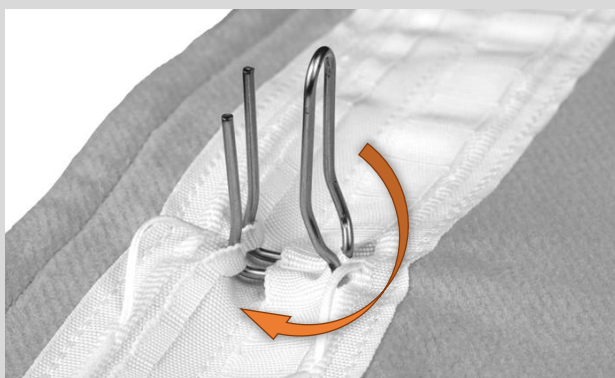

Turn the hooks twice through 90°. Once like this ...

Step 4



... and one more time.

Step 5




Press the hook together at the end and put it in the roller.

Step 6



Guide the rollers into the rail one after the other, holding the curtain with the other hand to reduce the tensile load on the first rollers.

Step 7

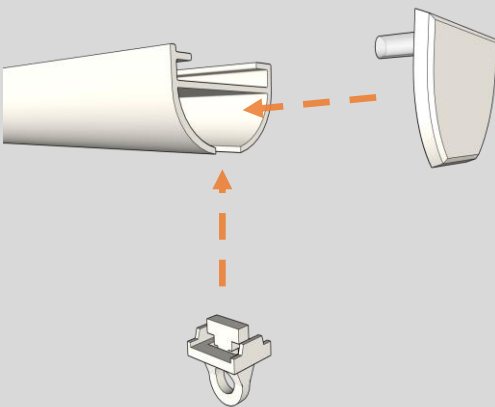

Attach the second stopper and end cover to the other end of the rail.



Done! Finally, check the system for stability and good roller running properties.

Additional Installation Instructions:

For the best possible installation, the surface should be as even as possible.

If you have any questions during the installation of the system, please do not hesitate to contact us by phone or e-mail.

Care Instructions:

The HOFA Curtain Rail Set Standard does not require any special maintenance; it should be protected from moisture, though.

▶ HOFA-Akustik

Phone: +49 7251 3472-400 | **Mail:** akustik@hofa.de | hofa-akustik.de/en

- ▶ **HOFA-Plugins** - Premium plugins for a perfect workflow when producing, mixing, and mastering.
- ▶ **HOFA-College** - The international online academy for audio engineering and music production.
- ▶ **HOFA-Media** - Your experienced partner for high-quality CD and pressing.
- ▶ **HOFA-Studios** - Recording, mixing & mastering in one of the most renowned recording studios in Germany.

hofa-plugins.de/en

hofa-college.de/en

hofa-media.de/en

hofa-studios.de/en

HOFA GmbH

Lusshardtstraße 1 -3, 76689 Karlsdorf | Phone 07251 / 3472 – 0 | Mail office@hofa.de | www.hofa.de/en
Managing Director: Jochen Sachse, Jan Bönisch | District Court Mannheim HRB Nr. 231615